


VIS GR. 10

LIFTING CHAINS

RUNDSTAHLKETTEN

Gr. 10


VIS 400

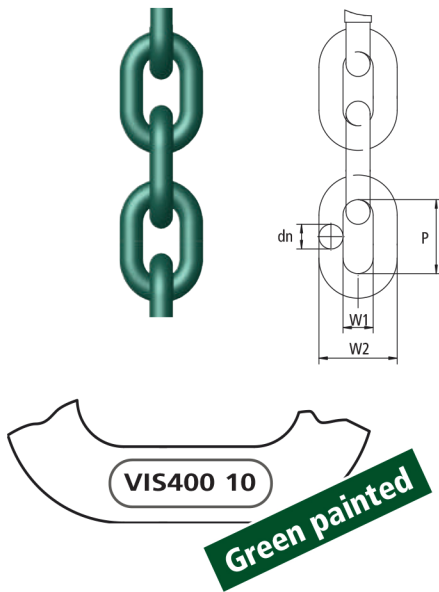

PAS 1061 - EN 818-2 + 25% of loads TEMPERATURE RANGE -40°C ÷ +380°C

ARTICLE // ARTIKEL	CHAIN // KETTE	DIMENSION			WLL	BF	WEIGHT // GEWICHT <small>approx</small>	
		dn	p	W1 (min)	W2 (max)	max		
		mm		mm	mm	t	kN	kg/m
VIS400-6	6	18	7,8	22,2	1,4	56,5	0,89	
VIS400-7	7	21	9,1	25,9	1,9	77	1,24	
VIS400-8	8	24	10,4	29,6	2,5	101	1,6	
VIS400-10	10	30	13	37	4	157	2,45	
VIS400-13	13	39	16,9	48,1	6,7	265	4,22	
VIS400-16	16	48	20,8	59,2	10	402	6,28	
VIS400-19	19	57	24,7	70,3	14	567	9,1	
VIS400-20	20	60	26	74	16	628	9,94	

VIS 200

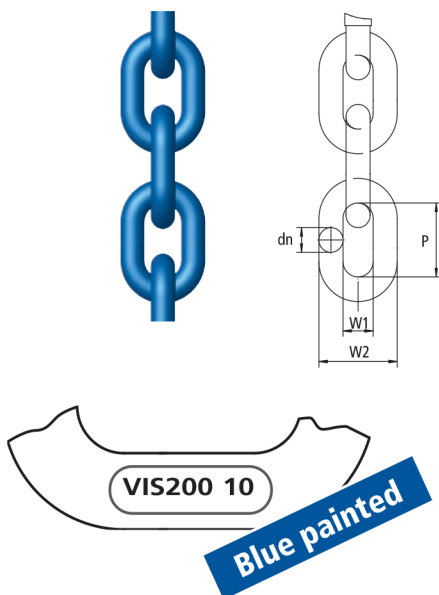

EN 818-2 + 25% of loads TEMPERATURE RANGE -29°C ÷ +205°C

ARTICLE // ARTIKEL	CHAIN // KETTE	DIMENSION			WLL	BF	WEIGHT // GEWICHT <small>approx</small>	
		dn	p	W1 (min)	W2 (max)	max		
		mm		mm	mm	t	kN	kg/m
VIS200-6	6	18	7,8	22,2	1,4	56,5	0,83	
VIS200-7	7	21	9,1	25,9	1,9	77	1,17	
VIS200-8	8	24	10,4	29,6	2,5	101	1,51	
VIS200-10	10	30	13	37	4	157	2,30	
VIS200-13	13	39	16,9	48,1	6,7	265	4,00	
VIS200-16	16	48	20,8	59,2	10	402	6,00	
VIS200-19	19	57	24,7	70,3	14	567	8,40	
VIS200-20	20	60	26	74	16	628	8,90	
VIS200-22	22	66	28,6	81,4	19	760	11,4	
VIS200-26	26	78	33,8	96,2	26,5	1060	16,0	

- VIS 200 can be certified according to ASTM A973
- VIS 200 kann nach ASTM A973 zertifiziert werden