


Series WA58÷WA67

Connecting link // Verbindungsglied

EN 1677-1

Can be certified according to ASTM A 952
Kann zertifiziert werden nach ASTM A952

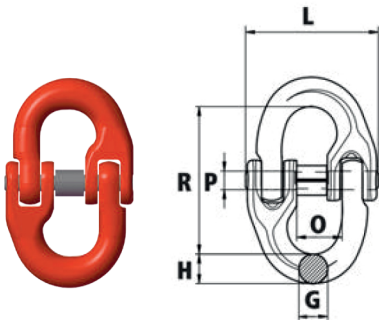


ARTICLE // ARTIKEL	CHAIN // KETTE	PCS/PACK // TEILE/BOX	DIMENSION					WEIGHT // GEWICHT	WLL
			G	H	O	R	PxL		
			mm					Approx	max
			mm					kg	t
WA58	6	20	7,6	7,8	14	44	4,8x39	0,07	1,12
WA60	7	30	9	10	17	51	6x47	0,12	1,5
WA59	8	20	10	11,5	18	61,5	6,3x53	0,19	2
WA61	10	40	12,6	13,8	22,5	72	8x63	0,38	3,15
WA62	13	20	16,7	19	27,5	88	10x79	0,73	5,3
WA63	16	12	21	21	33	103	14x106	1,43	8
WA64	20	8	23,5	29,5	41,5	115	16x123	2,65	12,5
WA65	22	5	27	29	48,5	135	16x150	3,75	15
WA66	26	4	31,5	31,5	60	147	18x159	4,10	21,2
WA67	32	1	32	40	80	194	25x195	8,05	31,5

Series WA40÷WA45

Eye grab shortening hook // Verkürzungshaken mit Öse

EN 1677-1




ARTICLE // ARTIKEL	CHAIN // KETTE	PCS/PACK // TEILE/BOX	DIMENSION					WEIGHT // GEWICHT	WLL	
			E	F	G	H	O			
			mm					Approx	max	
			mm					kg	t	
WA40	7-8	40	10	15,5	30	24	10	60	0,3	2
WA41	10	16	12	20,5	44	32	13	80	0,6	3,15
WA42	13	10	16	25	53	38	17	104	1,3	5,3
WA43	16	8	20	31	64	45	20	114	2,2	8
WA44	20	1	24	36	85	53	23	135	4	12,5
WA45	22	1	25	41	97	62	27	158	5,8	15

Can be certified according to ASTM A 952 // Kann zertifiziert werden nach ASTM A952

Series WA90÷WA95

Clevis grab shortening hook // Verkürzungshaken mit Gabel

EN 1677-1

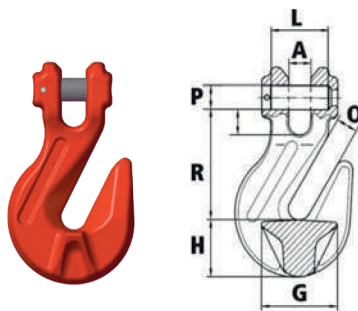


ARTICLE // ARTIKEL	CHAIN // KETTE	PCS/PACK // TEILE/BOX	DIMENSION					WEIGHT // GEWICHT	WLL	
			A	G	H	O	R			
			mm					Approx	max	
			mm					kg	t	
WA90	7-8	40	9	30	24	10	50	9x23	0,3	2
WA91	10	16	13	44	31	13	72	13x31,5	0,75	3,15
WA92	13	10	17	53	38	17	88	16x42	1,4	5,3
WA93	16	7	21	64	44	20	102	21x51,5	2,5	8
WA94	20	5	24	85	53	24	117	24x61,5	4,3	12,5
WA95	22	1	26	97	62	27	139	26x72	6,4	15

Can be certified according to ASTM A 952 // Kann zertifiziert werden nach ASTM A952

Series FHE

Eye foundry hook // Gießereihaken mit Öse

EN 1677-1

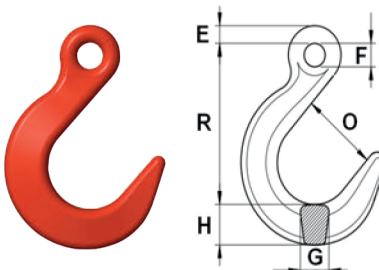

ARTICLE // ARTIKEL	CHAIN // KETTE	PCS/PACK // TEILE/BOX	DIMENSION					WEIGHT // GEWICHT	WLL	
			E	F	G	H	O			
			mm					Approx	max	
			mm					kg	t	
FHE7-8	7-8	18	13,5	18	26	31	63	122,5	1,13	2
FHE10	10	8	16	22	32	36	77	149	2	3,15
FHE13	13	6	19	27	39	43	88	173,5	3,3	5,3
FHE16	16	4	24	32	45	50	100	205	5,3	8
FHE19-20	19-20	1	27	38	51	61	115	237	7,7	12,5

Can be certified according to ASTM A 952 // Kann zertifiziert werden nach ASTM A952