


D-F3

CONSTRUCTION: 12-strand braided heat set line

MATERIAL: 100% Nexsteel (HMPE) + special surface finish

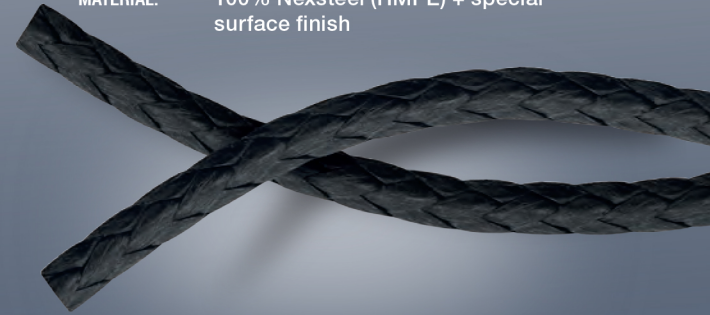

New in our product range!

Developed in cooperation with riggers for all standing rigging applications, where minimal elongation is necessary. The line surface is finished with Polyurethane coating, which gives you excellent resistance against UV and abrasion.

Elongation of the line reaches max. 2 % by 30 % of breaking load.

Diameter		Breaking Load		Weight	
mm	Inch	daN	lbs	kg/100 m	lbs /100 feet
2	1/12	340	661	0.3	0.2
3	1/8	800	1763	0.5	0.3
4	5/32	1000	2204	0.8	0.5
5	3/16	2250	5070	1.4	0.8
6	1/4	3100	7054	2.0	1.3
8	5/16	5200	11684	3.6	2.4
10	3/8	7750	17416	4.6	3.1
12	1/2	11500	25794	8.0	5.4
14	9/16	20000	44974	11.7	7.9
16	5/8	26000	58422	15.1	10.1

