


# Key West

**CONSTRUCTION:** 3-strand twisted line

**MATERIAL:** High Tenacity Polyester

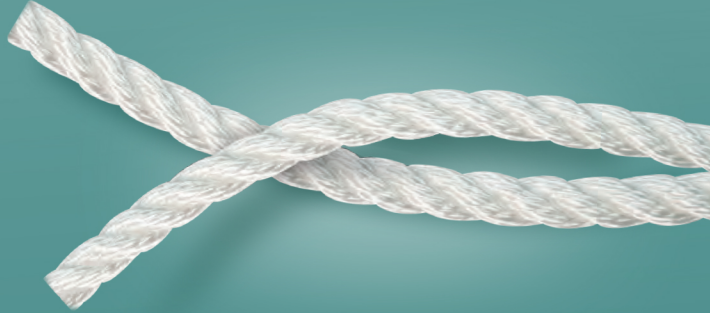

Key West – conventional mooring line with a simple construction, easy to splice, with excellent abrasion resistance and a long service life.

Diameter		Breaking Load		Weight	
mm	Inch	daN	lbs	kg/100 m	lbs /100 feet
8	5/16	1060	2332	4.9	3.3
10	3/8	1620	3564	7.6	5.1
12	1/2	2300	5060	10.9	7.3
14	9/16	3090	6798	14.9	10.0
16	5/8	4000	8800	19.4	13.0
18	3/4	5000	11000	24.6	16.5
20	13/16	6100	13420	30.3	20.4
22	7/8	7310	16082	36.7	24.7
24	15/16	8610	18942	43.7	29.4
26	1	10100	22220	51.2	34.4
36	13/8	19000	41800	98.2	66.0

