


With Suspension Eye

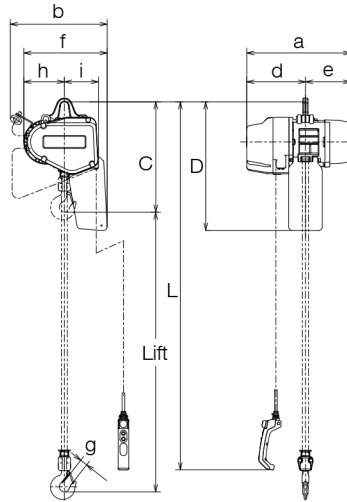

- Standard length of power supply cable is five meters.
- Optional length of lift, push button cord and power supply cable besides standard is available on your request.
- Extending the load chain is prohibited with additional links.

Specifications

Capacity (t)	Product Code	Hoist Body	Standard Lift (m)	Push Button Cord L (m)	Lifting Motor		Lifting Speed (m/min)*			No load High speed	Load Chain		Classification ISO/FEM/ASME	Test Load (t)	Net Weight (kg)	Additional Weight per 1m Lift (kg)
					Output (kW)	Rating (%ED)	50/60Hz				Diameter (mm)	Chain Falls				
							High	Low	No load High speed							
125kg	EQ001IS	C	3	2.5	0.5	40/20	17.0	2.8	22.1	22.1	5.6	x 1	M6/3m/H4	156kg	30	0.71
250kg	EQ003IS						10.0	1.7	13.0	13.0						
500kg	EQ005IS						7.6	1.3	9.9	9.9						
1	EQ010IS	D			1.5		7.1	1.2	9.2	9.2	7.1	x 1	M5/2m/H4	1.25	42	1.14

Note: The high speed is preset to the maximum speed in KITO factory. The speeds are adjustable between High and Low.

Dimensions (mm)

Capacity (t)	Product Code	Headroom C	D	a	b	d	e	f	g	h	i
125kg	EQ001IS	395									
250kg	EQ003IS		485	417	367	230	187	298	27	137	128
500kg	EQ005IS		410								
1	EQ010IS	465	535	433	403	245	188	332	31	154	142

Suspension Eye & Bottom Hook Dimensions (mm)

Capacity (t)	Product Code	Suspension Eye								Bottom Hook					
		a	b	R	i	k	j	m	n	D	g	h	f	e	c
125kg	EQ001IS														
250kg	EQ003IS	139.6	67.5	16.5	8	12.2	16	16	33	35.5	27	17.5	23.5	28	17.5
500kg	EQ005IS														
1	EQ010IS	153.6	71		12.3			22	34	42.5	31	22.5	31	36.5	22.5

