




S2-flat slings 1,0-10,0 t
with C-link or D-links

- Two-sided secutex-coating
- Tear-resistant label covered with a protective sleeve
- Optional fitting with an RFID transponder
- Loop reinforcement to protect from abrasion

S2 flat slings with a C-link or two D-links

The S2 flat slings also come in versions with a C-link or two D-links. The link has a guide channel (see illustration on p. 73) which supports the entire width of the strap and allows for gliding with minimal wear. The C-link can be quickly hooked and unhooked. The safety catch prevents the flat sling from slipping out unwanted and can be easily replaced in the event of damage.

The robust D-links give you considerably more flexibility. Simply thread one end of the strap through the opposite link – this ensures a lacing in which nothing can slip. Furthermore, the D-link makes it easier to hang the sling into spreader beams or crane hooks when applied in a single layer, as the links do not require a large contact area.

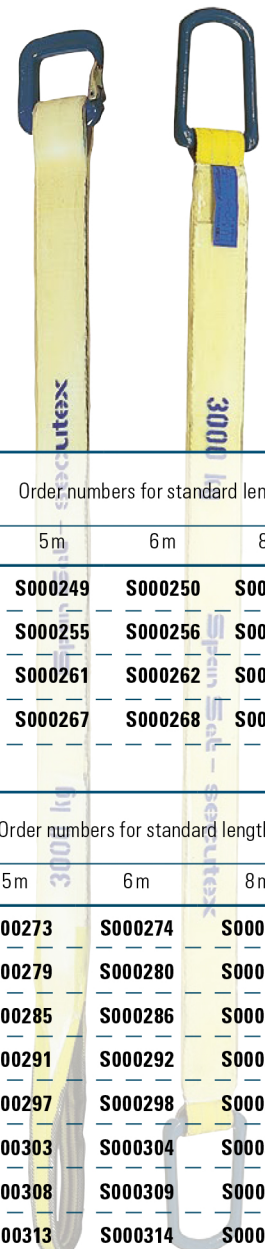

Nominal carrying capacity [kg]	Loop width [mm]	Loop length [mm]	L1 min. [m]	Strap width [mm]	Strap thickness [mm]	Approx. weight 1st m [kg]	Approx. weight per running m [kg]	Order numbers for standard lengths					
								2m	3m	4m	5m	6m	8m
1.000	30	300	1,0	40	17,1	1,4	0,8	S000246	S000247	S000248	S000249	S000250	S000251
2.000	35	300	1,0	70	17,5	2,9	1,4	S000252	S000253	S000254	S000255	S000256	S000257
3.000	50	400	1,0	100	17,9	5,0	2,1	S000258	S000259	S000260	S000261	S000262	S000263
5.000	80	500	1,5	160	18,9	11,2	3,7	S000264	S000265	S000266	S000267	S000268	S000269

Nominal carrying capacity [kg]	L1 min. [m]	Strap width [mm]	Strap thickness [mm]	Approx. weight 1st m [kg]	Approx. weight per running m [kg]	Order numbers for standard lengths					
						2m	3m	4m	5m	6m	8m
1.000	1,0	40	17,1	1,4	0,8	S000270	S000271	S000272	S000273	S000274	S000275
2.000	1,0	70	17,5	2,6	1,4	S000276	S000277	S000278	S000279	S000280	S000281
3.000	1,0	100	17,9	4,5	2,1	S000282	S000283	S000284	S000285	S000286	S000287
4.000	1,2	130	18,9	6,4	2,9	S000288	S000289	S000290	S000291	S000292	S000293
5.000	1,5	160	18,9	9,8	3,7	S000294	S000295	S000296	S000297	S000298	S000299
6.000	1,8	190	19,1	15,8	4,4	S000300	S000301	S000302	S000303	S000304	S000305
8.000	2,2	250	19,1	23,6	6,1	-	S000306	S000307	S000308	S000309	S000310
10.000	2,4	310	19,5	34,3	7,6	-	S000311	S000312	S000313	S000314	S000315

i Special designs available on request. Manufactured according to DIN EN 1492-2.



The explanations of the icons can be found on the flap.