


DC500 DRUM CLAMP



The DC500 drum clamp has been designed to lift and transport steel drums. If moving empty or sealed drums then one clamp is sufficient. Should you be lifting an open full drum, then two clamps should be used with a two leg chain sling.

This clamp is extremely light weight and very quick and easy to use.

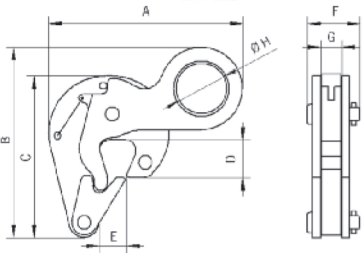

| Model | WLL kg* | A mm | B mm | C mm | D mm | E mm | F mm | G mm | H mm | Weight kg* |
|-------|---------|------|------|------|------|------|------|------|------|------------|
| DC500 | 500 | 152 | 150 | 127 | 30 | 21 | 41 | 17 | 40 | 1.2 |

*Per clamp. NB: For use with STEEL DRUMS only.

DCV500 'VERTICAL LIFT' DRUM CLAMP



The DCV500 drum clamp has been designed to lift and transport steel drums in the vertical position. One clamp can be used to lift drums with or without their lids by gripping the rim of the drum.


Its light weight and small overall design makes it ideal for picking up drums that sit tightly on pallets. The centre of gravity of the drum is below the lifting point during transportation.

The DVC500 is also available with a 'lock on / open latch'. Please contact the Camlok sales team for further details.

NB: For use with STEEL DRUMS only.

| Model | WLL kg | A mm | B mm | C mm | D mm | E mm | Weight kg* |
|--------|--------|------|------|------|------|------|------------|
| DCV500 | 500 | 479 | 350 | 410 | 300 | 50 | 7 |

*Per clamp.




DA/DAF 'LOW HEADROOM' DRUM GRABS



The DA drum grab is designed for the vertical transportation of steel drums. The jaws grab under the lip of the drum with its form-fitting connection.

The DAF drum grab works on the same principle as the DA grab, but has the added benefit of adjustable arms that can be used with a forklift.

NB: For use with STEEL DRUMS only.

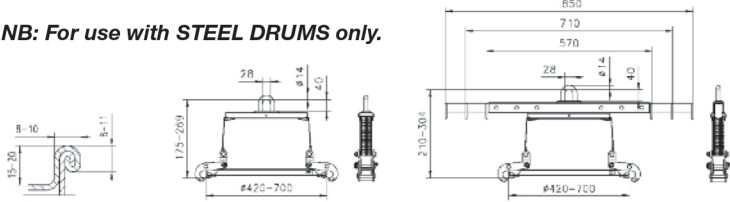

| Model | WLL kg | Jaw Capacity mm | Weight kg* |
|-------|--------|-----------------|------------|
| DA | 350 | 420 - 700 | 3.5 |
| DAF | 350 | 420 - 700 | 6.0 |

*Per clamp.