


TWER2M Twin Hook



KITO Twin Hook electric chain hoist, which is equipped with a single motor and two hooks, is intended to lift the hooks horizontally, equally and safely. This product is the most suitable for lifting applications requiring two lifting points for a wide load or retaining a level lifting. For special requirements such as dual speed or curve beam, consult with the nearest KITO dealer.

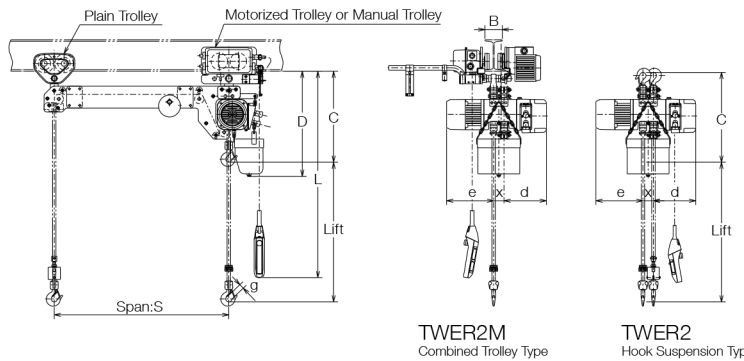

Specifications

Capacity (t)	Product Code	Hoist Body	Standard Lift (m)	ER2				Trolley				Test Load (t)		
				Lifting Motor		Load Chain	Traversing Motor		Traversing Speed (m/min)		Flange Width B (mm)			
				Output (kW)	Rating (%ED)		50Hz	60Hz	50Hz	60Hz				
125kg + 125kg	TWER2M003S	C	3	0.56	60	9.2	11.0	ø6.0 x 2	0.4	40	20 (10)	24 (12)	58 to 153	156kg x 2
250kg + 250kg	TWER2M005L					3.8	4.6							313kg x 2
	TWER2M005S	D	3	0.9	60	7.3	8.8	ø7.7 x 2	0.4	40	20 (10)	24 (12)	58 to 153	625kg x 2
500kg + 500kg	TWER2M010L					3.5	4.2							1.25 x 2
	TWER2M010S	E	3	1.8	60	7.1	8.5	ø10.2 x 2	0.75	40	20 (10)	24 (12)	82 to 178	1.88 x 2
1 + 1	TWER2M020L					3.7	4.4							3.13 x 2
	TWER2M020S	F	3	3.5	60	7.0	8.4	ø10.2 x 4	0.75	40	20 (10)	24 (12)	100 to 178	1.88 x 2
1.5 + 1.5	TWER2M030S					4.4	5.3							3.13 x 2
2.5 + 2.5	TWER2M050S					2.9	3.5	ø11.2 x 4	0.75	40	20 (10)	24 (12)	100 to 178	3.13 x 2

Note: The bracketed figures in Traversing Speed are low speed. This product is designed for straight beams. Specify a beam width at the time of quotation or order. The following information will be provided upon your request: 1) precise weight depending on length of the hook span 2) availability of curve beams 3) availability of a lift exceeding the maximum (8m)

Dimensions (mm)

Capacity (t)	Product Code	Headroom C		D	S	d	e	g	x
		With Trolley	Hook						
125kg + 125kg	TWER2M003S						271		60
250kg + 250kg	TWER2M005L	535	525	620	Min. 510	242		27	
	TWER2M005S						268		
500kg + 500kg	TWER2M010L	615	620	710	Min. 530	291	298	31	71
	TWER2M010S						307		
1 + 1	TWER2M020L	800	830	790	Min. 650	308	345	39	81
	TWER2M020S								
1.5 + 1.5	TWER2M030S	970	995	920		347	363	44	
2.5 + 2.5	TWER2M050S	1020	1025	990		337	399	47	85

Note: Maximum hook span (S) is 4m. Longer span is also available so contact the nearest KITO dealer.